



# SPEED VS TORQUE, CURRENT CURVE

SPEC. : 5.5 kW 4 P 60 HZ


TYPE : TEFC

VOLTAGE 440 (V)

RATED TORQUE : 3.1 Kg<sub>r</sub>·m

RATED CURRENT : 10.4 (A)

RATED SPEED : 1750 RPM

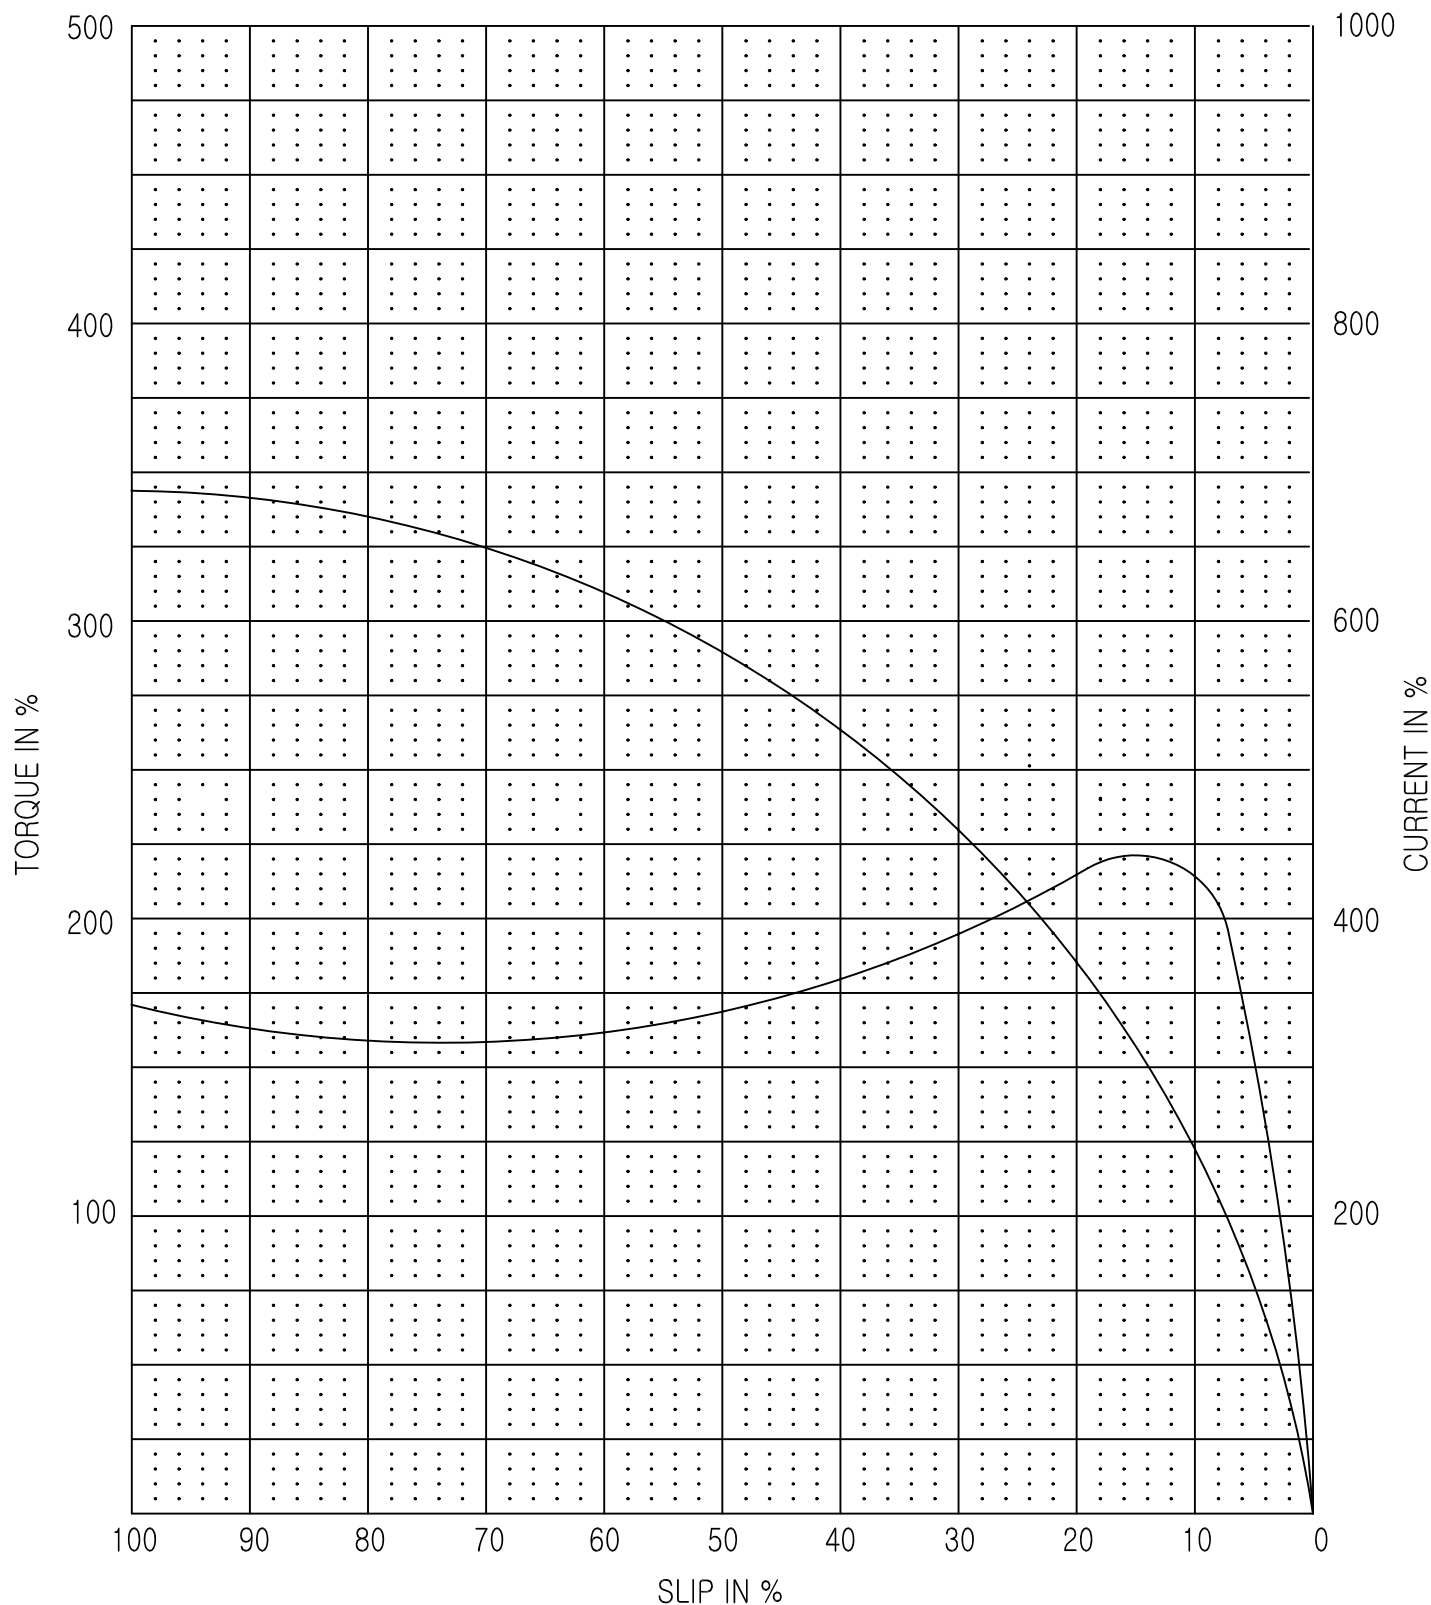

DWG NO.

ST-KMI-08HV1

PREPARED

CHECKED

APPROVED

**OTIS Elevator Korea**

2007.06.28  
J.H JO

2007.06.28  
J.H JO

2007.06.28  
H.J.KIM