



확 단 상 세 도

TAPER TYPE	KEY TYPE
M10 P1.25 유효길이 10 Taper 1/10 40 12 25 4 5 3 16$_{-0.018}^0$ 40 25 5 3 5$_{-0.03}^0$ 5$_{-0.03}^0$ 4.3$_{-0.1}^0$ SEC. X-X'	40 12 25 4 5 3 16$_{-0.018}^0$ 40 25 5 3 5$_{-0.03}^0$ 5$_{-0.03}^0$ 4.3$_{-0.1}^0$ SEC. X-X'




MS3102A20-15P
Motor Cable
Connector 접속도

Lead Wire 상표시	PIN 번호
U	A
W	B
V	C
Ground	D
Brake +	E
Brake -	F



MS3102A20-29P
Encoder Cable
Connector 접속도

ENCODER 신 호	CONNECTOR PIN 번호
0 V	G
V _{CC}	H
V _{BATTERY}	K
0 V _{BATTERY}	L
FG	N
SD	P
$\overline{\text{SD}}$	R
SHIELD	J

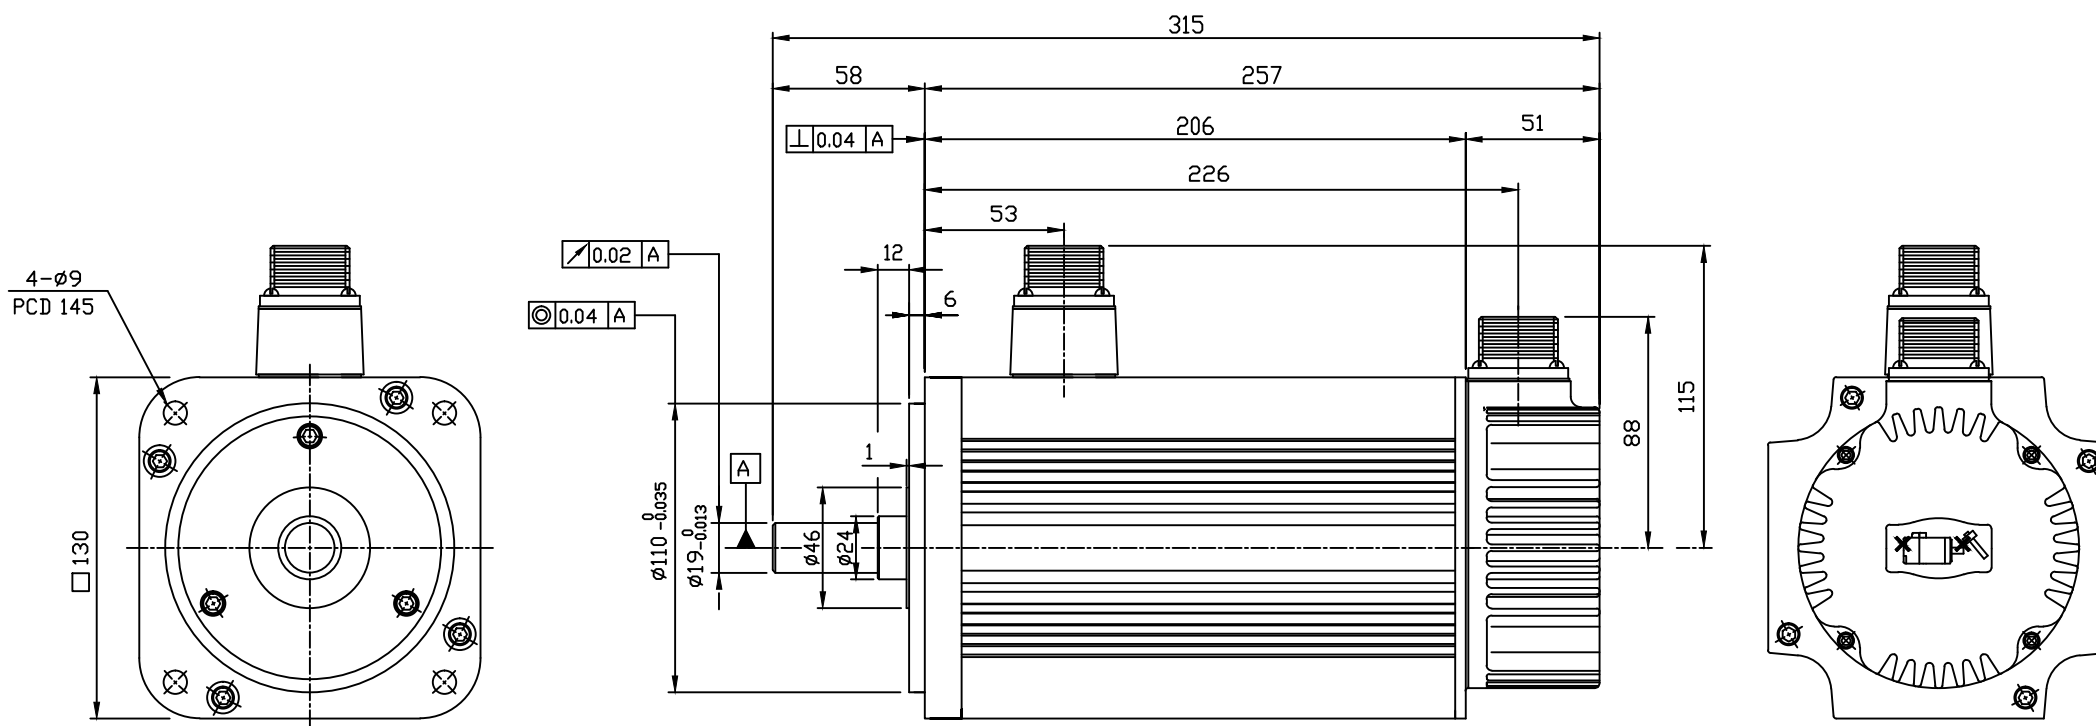

1. 브레이크 입력전원은 표준:DC90[V],특주:24[V]를
확인후 사용할 것.
2. 중량 : 10.4Kg

삼 각 법	단 위	mm	척 도	N / S	명칭	FMATF05-PB10	
제 도	설 계	검 도	승 인			F130(BRAKE TYPE)	
HIDEN			관계도번		도번		/