





TAPER TYPE		KEY TYPE	
SEC. X-X' 4.3^{+0/-0.1} 5^{+0/-0.03} 5^{+0/-0.03} M10 P1.25 유호길이 10 Taper 1/10 12 25 40 4 16^{+0.018/-0.018} 4	6 9 3.5 40 25		





MS3102A20-4P
Motor Cable
Connector 접속도

Lead Wire 신호선	PIN 번호
U	A
V	B
W	C
Ground	D



MS3102A20-29P
Encoder Cable
Connector 접속도

Encoder 位址	PIN 位址	Encoder 位址	PIN 位址
A	A	U	K
A	B	U	L
B	C	V	M
B	D	V	N
Z	E	W	P
Z	F	W	R
0V	G	SHIELD	J
+5V	H		

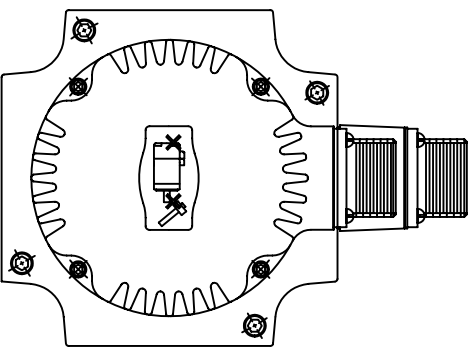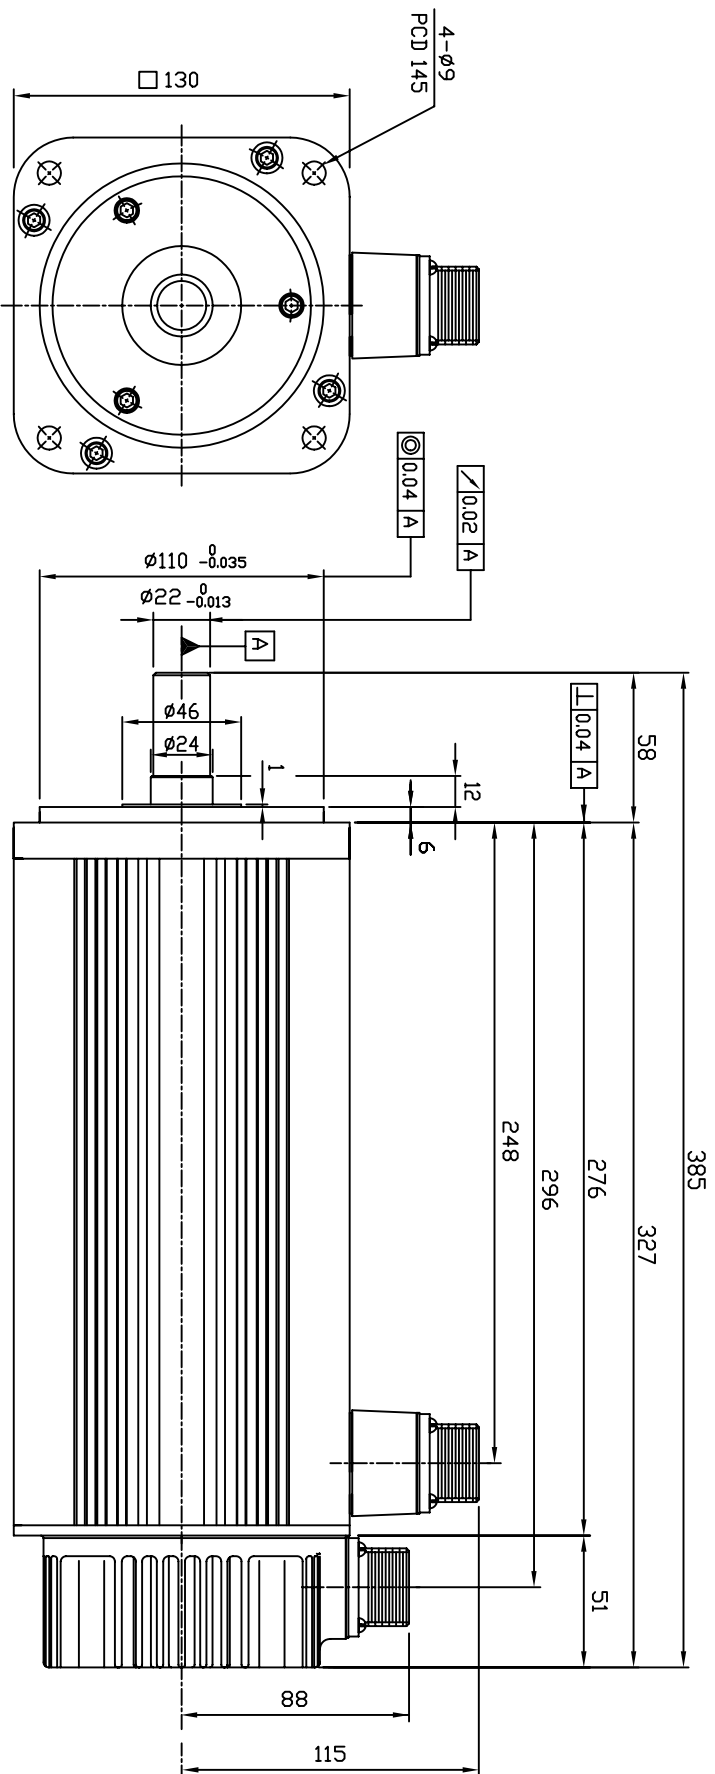

1. $m = 15.8 \text{ kg}$

상 각 법	단 위	mm	척 도	N / S	명칭 FMALF09-AB00 F130(표준 TYPE)	
	제 도	설 계	검 도	승 인		칭
2008.05.21	J.J.SEO	2008.05.21	I.K.KIM	2008.05.21	C.CHOI	
관계도면					도 면	