



측 단 상 세 도

TAPER TYPE	KEY TYPE
M10 P1.25 유효길이 10 Taper 1/10 40 12 25 4 5^{+0.03}_{-0.03} 5^{+0.03}_{-0.03} 4.3^{+0.01}_{-0.01} SEC. X-X'	40 25 3 5^{+0.03}_{-0.03} 5^{+0.03}_{-0.03}






MS3102A20-4P
Motor Cable
Connector 접속도

Lead Wire 상표시	PIN 번호
U	A
V	B
W	C
Ground	D



MS3102A20-29P
Encoder Cable
Connector 접속도

ENCODER 신 호	CONNECTOR PIN 번호
0 V	G
V _{CC}	H
V _{BATTERY}	K
0 V _{BATTERY}	L
FG	N
SD	P
SD	R
SHIELD	J

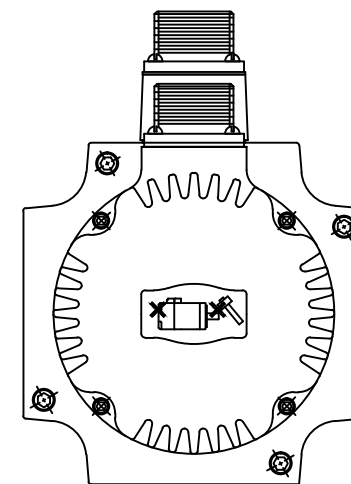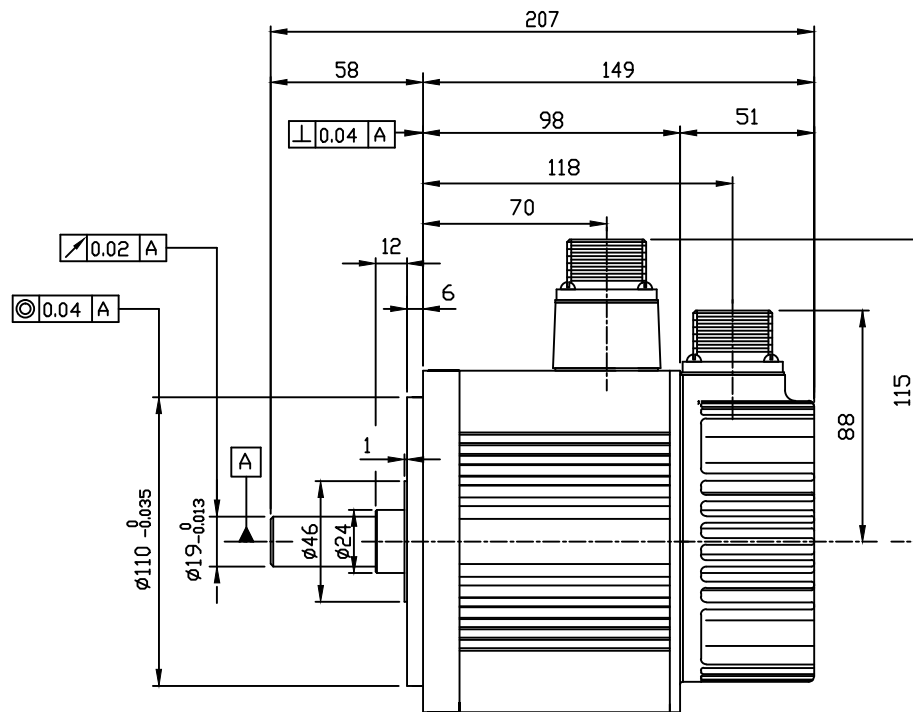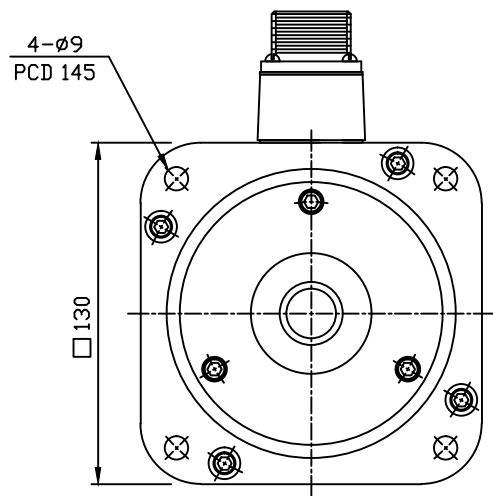

1. 중량 : 5.5Kg

삼 각 법	단 위	mm	척 도	N / S	명 칭	FMALN03-PB00	
제 도	설 계	검 도	승 인			N130<표준 TYPE>	
HIDEN			관계도번		도 번		